


SE868K5-D

GNSS

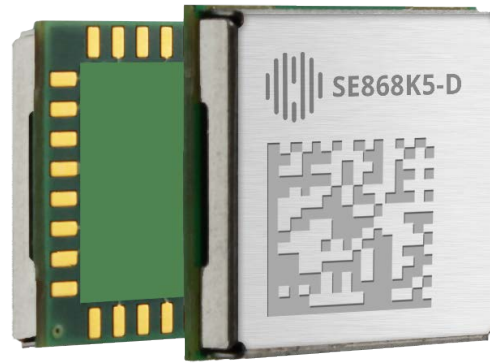

Product Description

The SE868K5-D is a multifrequency and multiconstellation positioning receiver module and a member of the xE868 Telit form factor family. It improves position reporting and navigation solution performance by combining:

- GPS/QZSS and Galileo in the L1/E1 and L5/E5 bands
- GLONASS in the L1 band
- BeiDou in the B1 and B2 bands
- Satellite-based augmentation systems (SBAS)

Using two frequencies (i.e., L1/E1 and L5/E5) enhances location accuracy and reduces multipath effects in urban areas. This module can navigate down to -165 dBm and proved optimal performance in harsh environments.

The SE868K5-D is pin-out compatible with the SE868SY family and legacy products JF2 and SE868 V3.

The SE868K5-D is encased in an 11 x 11 mm QFN-like package. It includes:

- A powerful baseband processor
- Flash memory
- Integrated LNA for optimal performance
- SAW filter for improved coexistence
- Switching regulator for best consumption

Its compact design and optimized positioning engine enable high-quality navigation in challenging outdoor scenarios (e.g., dense urban areas and harsh environments).

The SE868K5-D delivers navigation data over a serial interface (i.e., UART, I2C and SPI*) according to the NMEA protocol standard. It supports the output of raw measurements for high-precision applications.

The SE868K5-D supports ephemeris file injection (A-GNSS) and local prediction of short-term ephemerides for faster time to first fix (TTFF). It also supports SBAS or QZSS L1S signals or further increasing position accuracy.

Key Benefits

- Footprint compatible with SE868K5 family, with SE868SY family, and with legacy JF2 and SE868V3 variants
- Full GNSS compliance: GPS, GLONASS, Galileo, BeiDou and QZSS
- SAW filter for optimal coexistence with other radios
- Embedded LNA allows optimal performance even with passive antennas
- Supports ephemeris file injection (A-GNSS) as well as on-board ephemeris prediction (A-GPS)
- PVT Logging



Family Concept

Telit's positioning product portfolio is the result of over 20 years of experience in GNSS applications. Our product offering ranges from GPS-only and multiconstellation receivers to the best-in-class multifrequency modules. The SE868 family offers a broad series of positioning solutions and customizations in a compact 11 x 11 mm form factor. The integrated Telit proprietary commands enable easy transition between variants. These unified command sets reduce development complexity without additional costs.

Typical applications include:

- Fleet management systems
- E-mobility applications
- Road tolling systems
- Cellular base stations
- Automotive telematics systems
- Wearable sports training monitors
- Drones

SE868K5-D

Product Features

- 32-pad QFN-like package
- Frequency bands: GPS/QZSS L1 + L5, Galileo E1 + E5, GLONASS L1, BeiDou B1 + B2
- 75 (L1-band) / 60 (L5-band) tracking channels
- Standards: NMEA/RTCM
- Jamming rejection
- Low power modes
- A-GNSS: Self-generated prediction and ephemeris file injection
- Up to 10 Hz update rate
- Telit proprietary PTWS commands
- EGNOS, WAAS, GAGAN and MSAS capability embedded with positional error correction for augmented accuracy and integrity
- Embedded SAW for optimal coexistence and LNA for improved performance
- Raw measurements output in RTCM format for high-accuracy applications

Environmental

- Dimensions: 11 x 11 x 2.8 mm
- Weight: 1 g
- Temperature range:
 - Operating temperature: -40 °C to +85°C
 - Storage temperature: -40 °C to +85°C

Interfaces

- UART, I2C and SPI* interfaces
- A pulse per second (1PPS) output for precise timing

Approvals

- RoHS compliant
- RED

Electrical & Sensitivity

- Power supply:
 - From 1.72 V up to 1.89 V
- Power consumption (G3BQ): L1 + L5, 1Hz at 1.8 V
 - Acquisition: 54 mW
 - Tracking/Navigation: 59 mW
 - RTC mode: 36 µW (typical)
- Sensitivity (G3BQ): L1 + L5
 - Acquisition: -146 dBm
 - Tracking and Navigation: -165 dBm
- Horizontal positional accuracy:
 - CEP50: <1 m
- Time to first fix (90% @ -130 dBm):
 - Hot start: 1 s
 - Warm start: 18 s
 - Cold start: 28 s

*Roadmap



Nieuwland Parc 13i
2952 DA Alblasserdam
T +31 (0)78 6215900
F +31 (0)78 6215815
E info@ave-nl.com
W www.ave-nl.com

QUESTIONS? VISIT WWW.TELIT.COM/CONTACT-US

 Like Us on Facebook  Follow Us on LinkedIn  Follow Us on X  Subscribe to Our Channel